

## Foreman - Bug #13179

### oVirt Network selection doesn't select the right network during building host

01/13/2016 09:17 AM - Diego Michelotto

<b>Status:</b>	Closed	
<b>Priority:</b>	Normal	
<b>Assignee:</b>		
<b>Category:</b>	Compute resources - oVirt	
<b>Target version:</b>		
<b>Difficulty:</b>		<b>Fixed in Releases:</b>
<b>Triaged:</b>		<b>Found in Releases:</b> 1.9.3
<b>Bugzilla link:</b>		<b>Red Hat JIRA:</b>
<b>Pull request:</b>		

#### Description


Dear Foreman Team,

I have a problem during the building of an oVirt host from foreman web interface.

I have different network defined in my oVirt Datacenter as you can see in the next screenshot.

Name	Data Center	Description	Role	VLAN tag	Label
cloudadmin	Testbed	cloudadmin	vm	1096	-
cloudpub	Testbed	cloudpub	vm	96	-
ocpadmin	Testbed	ocpadmin	vm	1098	-
ocpdata	Testbed	ocpdata	vm	3098	-
ocpmgmt	Testbed	ocpmgmt	vm	2098	-
ocppub	Testbed	ocppub	vm	98	-
ovirtmgmt	Testbed	Management Network	vm	-	-

When I try to create a new host from Foreman, during the interface configuration I see all the networks, as you can see in the next screenshot.

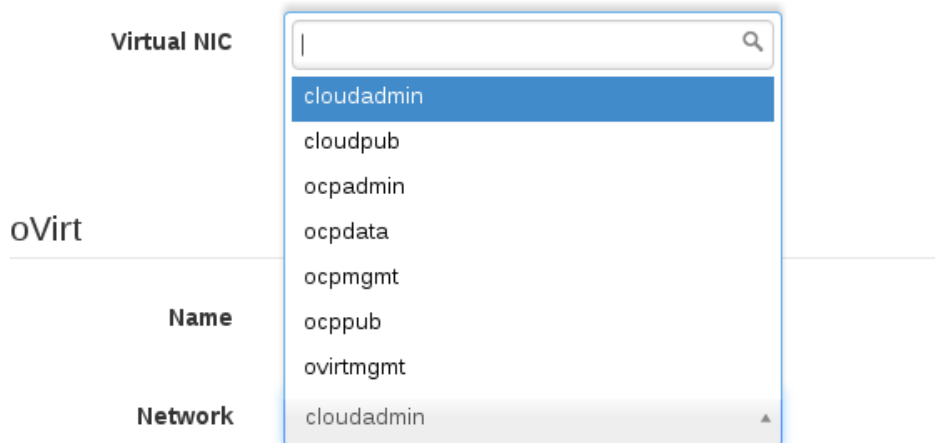

If I select a network that aren't the first suggested (the first suggested is cloudadmin) for example ocpadmin and I save it, when I reopen the interface configuration form all is OK (is selected ocpadmin in the dropdown menu). After the other configuration I submit the host creation. The result is a new host created on oVirt with a network interface configured with cloudadmin network that are the first suggested in the network dropdown menu. As you can see in the next screenshot.

General							Network Interfaces	Disks	Snapshots	Applications	Affinity Groups	Permissions
New							Edit	Remove				
Name	Plugged	Network Name	Profile Name	Link State	Type							
▲ nic1	<input checked="" type="checkbox"/>	cloudadmin	cloudadmin	Up	VirtIO							

If I edit the new host and open the interface configuration form I found cloudadmin as selected item in the network dropdown menu as you can see in the next screenshot.

## oVirt

**Name**

**Network**

As test I tried to create a new host with the hammer cli and I can create a new host successfully with the correct network configuration.

For these reason I think there are some problems in the network configuration form.

Note: I have an old instance of Foreman (1.7.3) and I don't have this problem.

foreman 1.9.3 and 1.10  
oVirt 3.5.5

Best regards.  
Diego

### Related issues:

Copied to Foreman - Bug #13591: oVirt Network selection doesn't select the ri...

**Duplicate**

**01/13/2016**

### History

#### #1 - 01/13/2016 09:22 AM - Dominic Cleal

- Category changed from Web Interface to Compute resources - oVirt  
- Priority changed from Urgent to Normal

#### #2 - 02/05/2016 09:49 AM - Diego Michelotto

Any news about this bug, for us is critical.

Best regards  
Diego

#### #3 - 02/08/2016 04:07 AM - Diego Michelotto

- Copied to Bug #13591: oVirt Network selection doesn't select the right network during building host added

#### #4 - 02/08/2016 05:04 AM - Diego Michelotto

The bug still exist in the 1.10.1 release.

Regards  
Diego

#### #5 - 02/08/2016 07:46 AM - Doina Cristina Aiftimiei

Would it be possible to have an assessment of when the issue could be solved?  
Is critical for us ... and even a surprise as older version was not affected.

**#6 - 02/24/2016 10:33 AM - Diego Michelotto**

The bug still exist in the 1.10.2 release.

Regards  
Diego

**#7 - 04/01/2016 09:46 AM - Diego Michelotto**

The bug still exist in the 1.10.3 and 1.11.0 releases.

Please have a look, for us is critical this bug.

Regards  
Diego

**#8 - 04/11/2016 08:09 AM - Diego Michelotto**

Hi,

any news about this bug?

Best regards  
Diego

**#9 - 05/12/2016 06:03 AM - Angelo Lisco**

Hi Diego, take a look at the patch attached to this bug and check if it fixes your issue:

<http://projects.theforeman.org/issues/15020>

**#10 - 05/12/2016 08:46 AM - Diego Michelotto**

Hi Angelo,

this patch doesn't fix my bug, the nic\_info script isn't loaded at the creation of new oVirt Host. This script is used for select the correct oVirt Network when the host is already created.

Best regards  
Diego.

**#11 - 05/20/2016 02:55 PM - Angelo Lisco**

Whoops...sorry for the noise :(

**#12 - 01/18/2017 08:59 AM - Diego Michelotto**

Bug still present in 1.12.4

**#13 - 02/03/2017 03:34 AM - Diego Michelotto**

After upgrade of our instance of oVirt to oVirt 4.0 the bug is gone.

**#14 - 05/10/2018 06:43 AM - Shira Maximov**

- Status changed from New to Closed

The bug is gone after upgrading Ovirt.

**Files**

---

foreman_network_host.png	5.45 KB	01/13/2016	Diego Michelotto
ovirt_network_host.png	12.7 KB	01/13/2016	Diego Michelotto
ovirt_networks.png	25.4 KB	01/13/2016	Diego Michelotto
foreman_networks.png	14.9 KB	01/13/2016	Diego Michelotto